



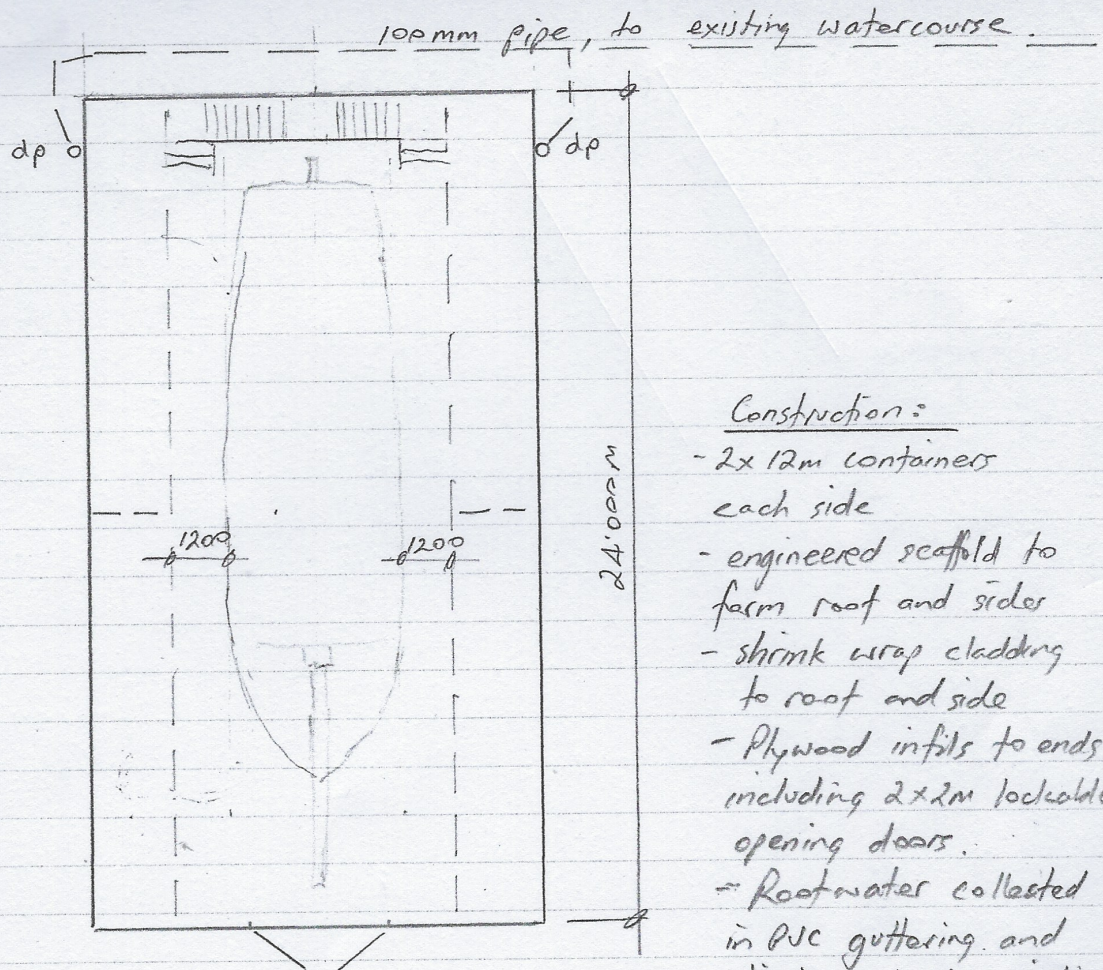

Construction:

- 2x 12m containers each side
- engineered scaffold to form roof and sides
- shrink wrap cladding to roof and side
- Plywood infills to ends including 2x2m lockable opening doors.
- Roofwater collected in PVC guttering and discharged into existing watercourse. (Shared with Museum)
- Scaffold to be welded to containers.

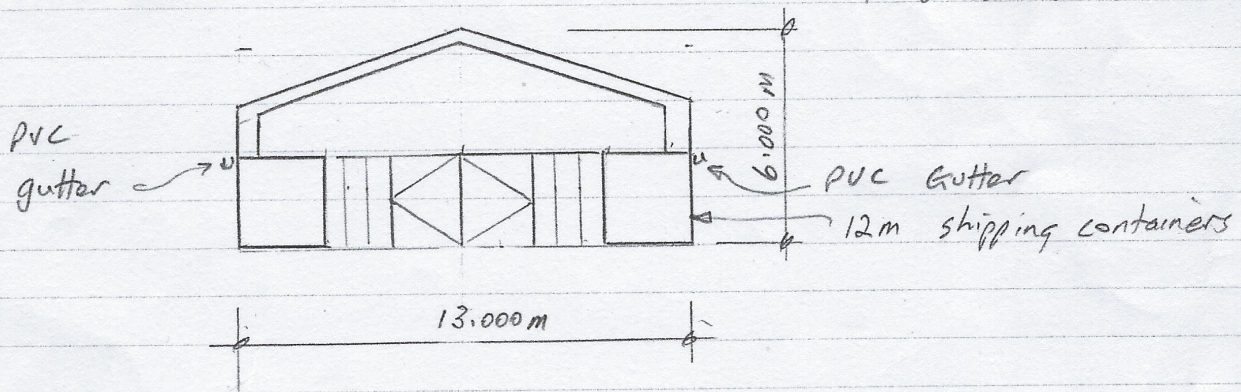

Proposed
Temporary Enclosure for Daring